


Contractor: _____ Project: _____

RTSPUCES

Quantity: _____

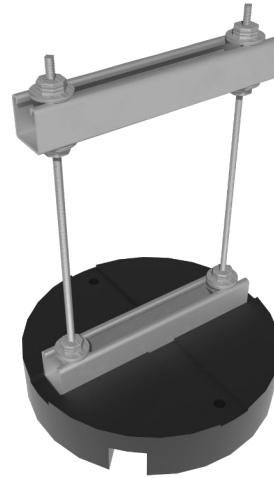

Non-penetrating pipe support for roof mounted gas, conduit, solar, or other mechanical piping.

Base Material: Compression molded recycled rubber (97% recycled material).

Base Dimensions: 12-inch Diameter. 71.5 in² surface contact.

Pipe Clearance: Adjustable height of 6 inches – 12 inches. .

Maximum Load Weight: Based on structural capacity of structure:

140 lbs. at 2 PSI, 210 lbs. at 3 PSI (per pipe support)

Pipe Rests on 10" x 1-5/8" x 1-5/8" 12-gauge strut channel.

Threaded Rod/Hardware finish: [Electrogalvanized] or [Stainless Steel].

Strut finish: [Electrogalvanized], [Hot Dip Galvanized], or [Stainless Steel].

Spacing: Horizontal support spacing according to pipe specification, or horizontal pipe support spacing according to applicable building code. Do not exceed manufacturer's suggested spacing of 8-foot centers as loading permits.

Installation Instructions:

1. Place base on roof based on design layout.
2. Run pipe accordingly.
3. Adjust height of support as needed.
4. Connect pipe to base using pipe clamp or roller per application requirements.

****NOTE: No adhesive is to be used with this product to attach to the roof.

