


Contractor: _____ Project: _____

RTSSPBWIND

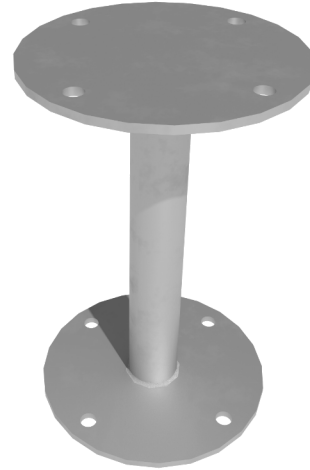

Direct Mount tie down for use with H-Stands, Equipment supports, Crossover units, and Access Platforms to combat wind forces.

Base Material: Solid Steel.

Base Dimensions: 8" Diameter x [12-1/2"] or [24-1/2"] .

Clearance: Minimum mount height of +/-12-1/2" above structure with 12" version.

Maximum Load Weight: Based on structural capacity of roof substructure.

Steel Component: [12"] or [24"] 1-3/4" solid round bar welded to two 8"D 1/4" plates.

Steel finish: [Hot Dip Galvanized].

Spacing: Horizontal support spacing according to pipe specification, or horizontal pipe support spacing according to applicable building code. Do not exceed manufacturer's suggested spacing of 8-foot centers as loading permits.

Installation Instructions:

1. Place base on roof based on design layout.
2. Cut roofing membrane and insulation to expose structure.
3. Bolt base to structure using appropriate fastener.
4. Waterproof roofing penetration with flashing or a pitch-pocket.
5. Lash to framing of support using appropriately sized cable (by others)

