

## Rooftop Support Systems

a division of Eberl Iron Works, Inc.  
128 Sycamore Steet  
Buffalo, New York 14204


(888) 243-2669  
RTS@eberliron.com  
rooftopsupportsystems.com



# RTSCO-8STR

## PRODUCT SUBMITTAL SHEET

### CROSSOVER ROOF STAIR

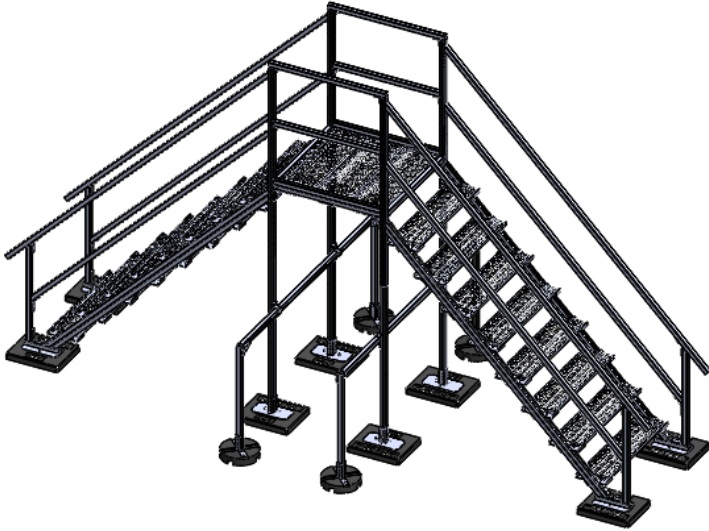

### Description

Crossover stair units utilizing 12 gauge framing and non-penetrating recycled rubber bases to provide safe pathways over rooftop obstacles for maintenance traffic.

### Product Information

**Compatible Bases:** RTSF21

**Clearance:** 79-1/2 in from top of roof

**Maximum Load Weight:** 36 in width - 460 lbs, 42 in width - 400 lbs, 48 in width - 350 lbs

**Framing:** Welded and single 1-5/8 in x 1-5/8 in, 12 gauge strut channel

**Grating:** 11-3/4 in and 9-1/2 in wide x 1-1/2 in high, 12 gauge anti-slip plank grating with 10 gauge carrier angles

**Framing/Grating Finish:** Pre-Galvanized (G90), Hot Dip Galvanized (ASTM 123), or 304 Stainless Steel

**Hardware Finish:** Electro-Galvanized (ASTM B633), Hot Dip Galvanized (ASTM 123) , or 304 Stainless Steel

### Installation

1. Place bases on roof per design layout
2. Insert welded 1-5/8" x 1-5/8" strut onto bases. Secure each with (1) 3/8 in channel nut and bolt (19 ft/lbs). All other framing hardware is 1/2 in tightened to 50ft/lbs
3. Attach corner fittings to the vertical strut at the correct height for the platform
4. Using 1-5/8 in x 3-1/4 in welded channel to connect the sides, and 1-5/8 in x 1-5/8 in strut to connect the ends of the platform
5. Attach grating to the underside of the 1-5/8 in x 3-1/4 in strut through the carrier angles
6. Connect beveled 1-5/8 in x 3-1/4 in welded strut to the columns for stair stringers using the 45 degree fitting and RTSSTRBASE at the base
7. Attach the right and left stair brackets to the stringers hand tight. Install the 9-1/2 in stair grating to the stair brackets and secure with 5/16 in hardware. Level the stairs at the correct heights and tighten bolts
8. Install railings on the stairs using the angle brackets, and on the platform using the 90° degree brackets
9. Attach outrigger assembly

Quantity:

Contractor:

Project:

